




无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

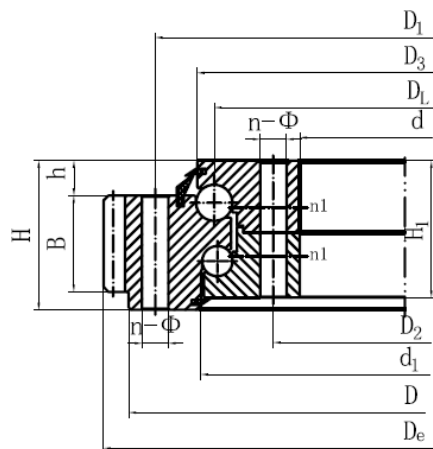

JB/T2300-1999

021 serie

022 serie

Number	Basic Type	Dimensions			Installation hole size				Structure size				Gear Data				Tangential Tooth Load		Weight Reference (KG)	
	Outer teeth D_L mm	D mm	d mm	H mm	D_1 mm	D_2 mm	n	Φ mm	n_1	D_3 mm	d_1 mm	H_1 mm	h mm	B	m	D_e	Z	Normalizing KN		Tempering KN
1	021.25.500	616	384	106	580	420	20	18	4	523	518	96	26	60	5	644	126	37	52	130
	6														646.8	105	45	62	130	
2	021.25.560	676	444	106	640	480	20	18	4	583	578	96	26	60	5	704	138	37	52	146
	6														706.8	115	45	62	147	
3	021.25.630	746	514	106	710	550	24	18	4	653	648	96	26	60	6	790.8	129	45	62	173
	8														790.4	96	60	83	170	
4	021.25.710	826	594	106	790	630	24	18	4	733	728	96	26	60	6	962.8	141	45	62	190
	8														862.4	105	60	83	187	
5	021.30.800	942	658	124	898	702	30	22	6	829	823	114	29	80	8	982.4	120	80	111	305
	10														988	96	100	140	307	
6	021.30.900	1042	758	124	998	802	30	22	6	929	923	114	29	80	8	1086.4	133	80	111	349
	10														1088	106	100	141	348	
7	021.30.1000	1142	858	124	1098	902	36	22	6	1029	1023	114	29	80	10	1198	117	100	141	396
	12														1197.6	97	120	167	391	



无锡立达齿轮制造有限公司

WUXI LIDA GEAR MANUFACTURING CO., LTD

Number	Basic Type	Dimensions			Installation hole size				Structure size					Gear Data				Tangential Tooth Load		Weight Reference (KG)
	Outer teeth D _L mm	D mm	d mm	H mm	D ₁ mm	D ₂ mm	n	Φ mm	n ₁	D ₃ mm	d ₁ mm	H ₁ mm	h mm	B	m	De	Z	Normalizing KN	Tempering KN	
8	021.30.1120	1262	978	124	1218	1022	36	22	6	1148	1143	114	29	80	10	1318	129	100	140	445
	12														1317.6	107	120	167	439	
9	021.40.1250	1426	1074	160	1374	1126	40	26	5	1286	1282	150	39	90	12	1497.6	122	135	188	784
	14														1495.2	104	158	219	774	
10	021.40.1400	1576	1224	160	1524	1272	40	26	5	1436	1432	150	39	90	12	1641.6	134	135	188	870
	14														1649.2	115	158	219	878	
11	021.40.1600	1776	1424	160	1724	1476	45	26	5	1636	1635	150	39	90	14	1845.2	129	158	219	995
	16														1852.8	113	181	250	1003	
12	021.40.1800	1976	1624	160	1924	1676	45	26	5	1836	1835	150	39	90	14	2055.2	144	158	219	1147
	16														2060.8	126	181	250	1151	
13	021.50.2000	2215	1785	190	2149	1851	48	33	8	2038	2035	178	47	120	16	2300.8	141	241	333	1794
	18														2300.4	125	271	375	1780	
14	021.50.2240	2455	2025	190	2389	2091	48	33	8	2278	2275	178	47	120	16	2540.8	156	241	333	2017
	18														2552.4	139	271	375	2048	
15	021.50.2500	2715	2285	190	2649	2351	56	33	8	2538	2532	178	47	120	18	2804.4	153	271	375	2246
	20														2816	138	301	418	2280	
16	021.50.2800	3015	2585	190	2949	2651	56	33	8	2838	2832	178	47	120	18	3110.4	170	271	375	2553
	20														3116	153	301	418	2563	
17	021.60.3150	3428	2872	226	3338	2962	56	45	8	3198	3196	214	56	150	20	3536	174	377	522	4428
	22														3537.6	158	415	574	4414	
18	021.60.3550	3828	3272	226	3738	3362	56	45	8	3598	3596	214	56	150	20	3936	194	377	522	5012
	22														3933.6	176	415	574	4967	
19	021.60.4000	4278	3722	226	4188	3812	60	45	10	4048	4046	214	56	150	22	4395.6	197	415	574	5706
	25														4395	173	471	652	5656	
20	021.60.4500	4778	4222	226	4688	4312	60	45	10	4548	4546	214	56	150	22	4897.6	219	415	574	6293
	25														4895	193	471	652	6385	